

Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, solutions, machines, equipment and/or networks. They are important components in a holistic industrial security concept. With this in mind, Siemens' products and solutions undergo continuous development. Siemens recommends strongly that you regularly check for product updates.

For the secure operation of Siemens products and solutions, it is necessary to take suitable preventive action (e.g. cell protection concept) and integrate each component into a holistic, state-of-the-art industrial security concept. Third-party products that may be in use should also be considered. For more information about industrial security, visit

<http://www.siemens.com/industrialsecurity>.

To stay informed about product updates as they occur, sign up for a product-specific newsletter. For more information, visit <http://support.automation.siemens.com>.

Siemens AG
Industry Sector
Sensors and Communication
Postfach 48 48
90026 NÜRNBERG
GERMANY

Siemens Canada Limited
300 Applewood Crescent
Concord, Ontario
L4K 5C7
CANADA

Subject to change without
prior notice
Article No. 6ZB5531-0AB02-0BA2
DR.PN.SC.14.XXBR.95.86 /
Dispo 26000
BR 0914 2. SB 24 En
Printed in Germany
© Siemens AG 2014

The information provided in this brochure contains descriptions or characteristics of performance which in case of actual use do not always apply as described or may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.
All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.

SIEMENS



RUGGEDCOM Products at a Glance



Rugged network components


siemens.com/ruggedcom

Overview

Edition
09/2014

Answers for industry.

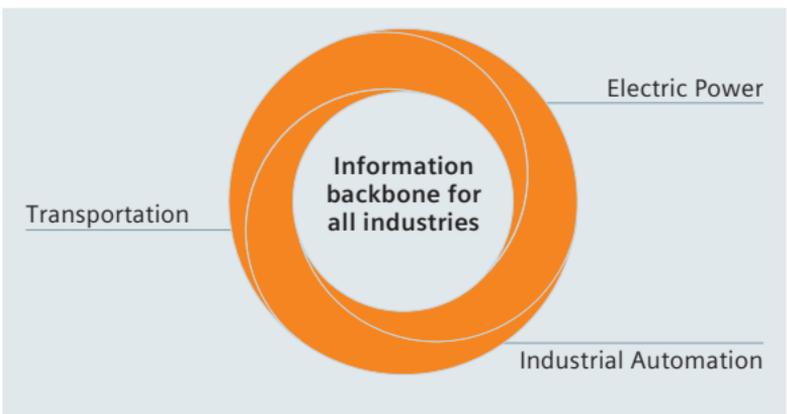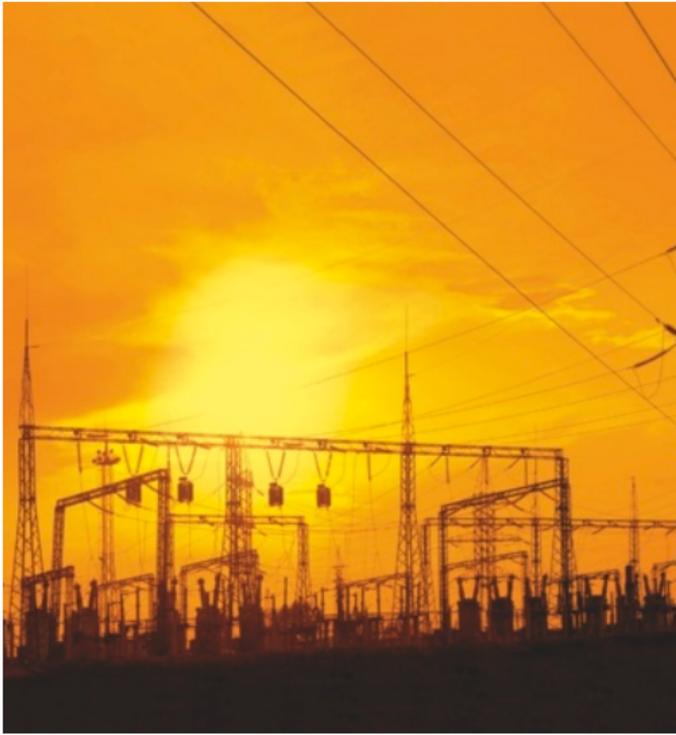

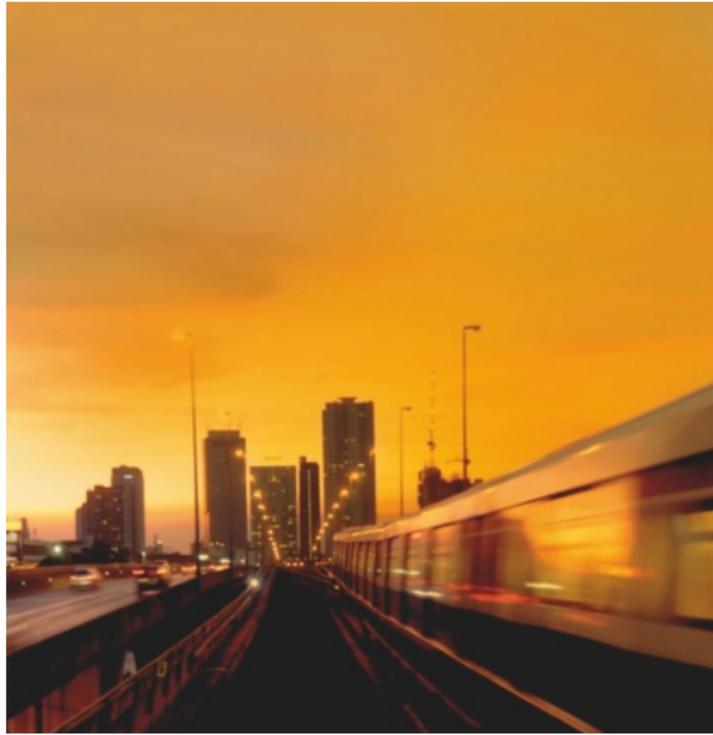

RUGGEDCOM Product Family

RUGGEDCOM products provide a level of robustness and reliability that have set the standard for communications networks deployed in harsh environments.

RUGGEDCOM products offer extreme temperature range, Zero-Packet-Loss technology for immunity to high levels of electromagnetic interference, and enhanced Rapid Spanning Tree Protocol (eRSTP™) for ultra high-speed network fault recovery.

RUGGEDCOM products can be found in mission critical networks used in substation automation, self healing power grids and “Smart Grid” systems, intelligent transportation systems for traffic management and in railway control systems, as well as in process control and manufacturing automation systems used across multiple industrial sectors.



Rugged Rated

Communications products that have been specifically designed and tested to withstand the demands of the substation environment.

Reliable operation in harsh electrical environments

- IEC 61850-3 and IEEE 1613 (electric power substations)
- IEC 61000-6-2 and IEC 61800-3 (industrial environments)
- NEMA TS-2 (traffic control equipment)
- EN 50121-4 (railway applications)
- EN 50155 (equipment on-board rail vehicles)

Error-free operation in high EMI environments

- Zero-Packet-Loss technology for fiber-based networking devices
- IEEE 1613 class 2 error-free performance under EMI stress
- Fiber optic ports supporting both short and long haul fiber

Operation over a wide temperature range

- -40°C to +85°C
- Passive cooling – no fans
- CSA/UL 60950 safety approved to +85°C

High availability

- Integrated single or redundant power supplies
- Universal high-voltage range: 88–300VDC or 85–264VAC
- Low Voltage power supplies
- Dual power supplies can be powered independently, from different input voltages



*“RUGGEDCOM
products are at
their best when
the environment
around them is
at its worst.”*

Industrial installations

- Metal enclosure
- Heavy duty mounting
- Industrial terminal blocks for power and I/O connections

HALT – Eliminate weaknesses in design

Highly Accelerated Life Testing (HALT) subjects design prototypes to vibration and ambient temperatures far beyond their normal operation range. Siemens uses HALT results to verify and improve its designs.

HASS – Remove manufacturing errors

Siemens performs Highly Accelerated Stress Screening (HASS) on all RUGGEDCOM products, in order to ensure a shipment that is free of manufacturing errors and random defects.

Multi Service Platforms

RUGGEDCOM's multi service platform products include a rich array of carrier grade features. A subset of the available software features common to multi service platform products are shown below:



RUGGEDCOM RX5000

- Up to 2x 10Gbps SFP+
- Support for up to 96 ports
- Modular redundant power supplies
- Six line module slots

RUGGEDCOM RX1500

- Modular redundant power supplies
- Four line module slots

RUGGEDCOM RX1501

- Modular single power supply
- Six line module slots

RUGGEDCOM RX1510

- Modular redundant power supplies
- Four line module slots

RUGGEDCOM RX1511

- Modular single power supply
- Two line module slots

RUGGEDCOM RX1512

- Fixed DC power supply
- Two line module slots

Cyber security appliance functions

- Integrated router/firewall/VPN
- VPN with 3DES, AES128, AES256 support
- RADIUS centralized password management
- Multi-level user passwords
- SSH/SSL (128-bit encryption)
- Enable/disable ports, MAC based port security
- Port-based network access control (802.1x)
- VLAN (802.1Q) to segregate and secure network traffic
- SNMP v3 encryption, integrity and authentication
- CheckPoint GAIa™ on RUGGEDCOM APE
- CROSSBOW SAC for NERC-CIP compliance

Routing

- MPLS
- VRRP, OSPF, BGP, IS-IS
- DHCP agent (option 82 capable)
- Traffic prioritization, NTP server
- IP multicast routing
- PIM-SM

Future-proof your investment with a modular platform.
Simplify your logistics with easy to spare components.
Improve your network uptime by reducing time to repair.

Switching

- Simple plug and play operation – automatic learning, negotiation and crossover detection
- MSTP 802.1Q-2005 (formerly 802.1s)
- RSTP (802.1w) and enhanced Rapid Spanning Tree (eRSTP™) network fault recovery (<5ms)
- Quality of Service (802.1p) for real-time traffic
- VLAN (802.1Q) and GVRP support
- Link aggregation
- Traffic prioritization
- Transaction-based configuration with rollback
- GMRP and services
- Telecom style CLI

WAN

- Frame Relay RFC 1490 or RFC 1294
- PPP
- PAP, CHAP authentication
- IEC 61850 GOOSE messaging support

Maximum Port Density


- 2x 10Gbps SFP+
- 24x 1Gbps copper
- 48x 100FX
- 96x 100TXs

Line Modules

- All modules are hot-swappable and field replaceable
- Power modules: HI (88–300 VDC or 85–264VAC), 48VDC (36–72VDC), 24VDC (15–36VDC), 12VDC (9–15VDC)
- 2-port Gigabit fiber, fixed, SFP, multimode, singlemode
- 3-port 10FL / 100SX, multimode
- 2-port 100FX, multimode, singlemode
- 4-port 100FX, fixed, SFP, multimode, singlemode
- 6-port 100FX, SFP, multimode, singlemode
- Single, dual, quad T1/E1 (channelized)
- Single, dual, E1 (channelized)
- Single 56K/64K DDS
- Dual port cellular (HSPA/EVDO)
- 6-port serial (RS232, RS422, RS485)
- RUGGEDCOM APE
- 4-port 100TX A- and D-coded M12
- 2-port Gigabit A- and X-coded M12
- Controlled and failsafe M12 bypass

RX1500 Family Line Modules

Modular, scalable and field replaceable for the entire family of RX15xx multi service platforms.

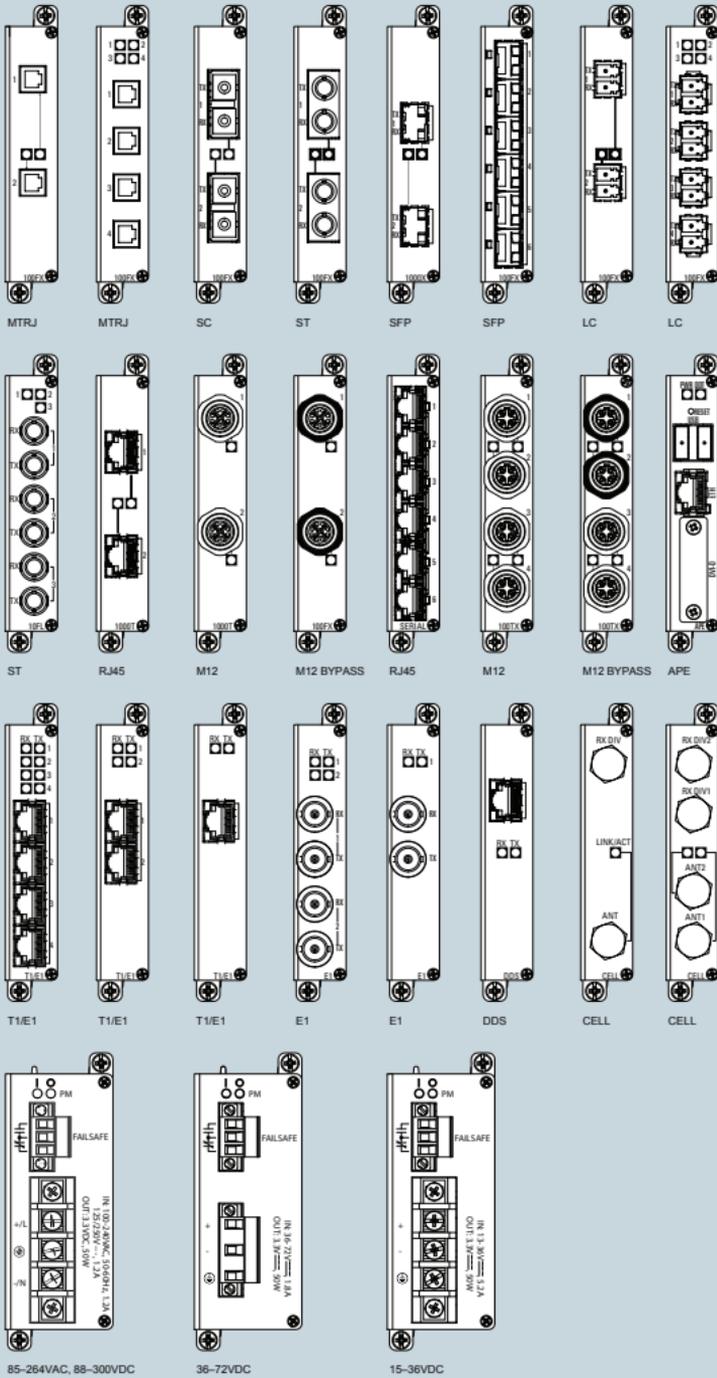

MIL-STD Ethernet Family

COTS switch and router technology that meets MIL-STD specifications.

RUGGEDCOM MX5000

MIL-STD Multi Service Platform

- Layer 2 and layer 3 platform
- Supports up to 48 ports 100FX or 24 ports GigE

RUGGEDCOM MX5000RE

MIL-STD Multi Service Platform with Enclosure

- MIL-STD switching/routing platform
- IP65 EMI/EMC/shock/vibration-rated packaging
- Replaceable enclosure

RUGGEDCOM M2100

MIL-STD 19-Port Modular Managed Ethernet Switch

- 3x 1000BaseX (Gigabit) +16x 10/100BaseX

RUGGEDCOM M2200

MIL-STD 9-Port Managed Gigabit Ethernet Switch

- 1000BaseX (Gigabit) and/or 10/100/1000BaseTX

RUGGEDCOM M969

MIL-STD and IP66/IP67 Rated 10-Port Managed Ethernet Switch with Fiber Uplinks

- 8x 10/100BaseTX ports + 2x 1000BaseX (Gigabit)
- IP66/67 rated

MIL-STD certified

- MIL-STD 901D – shock (hard mounted)
- MIL-STD 167 – vibration
- MIL-STD 461 – EMI
- MIL-STD 1399 – DC magnetic field exposure
- MIL-STD 810 – temperature and humidity

Common Features

- Many different fiber port options available
- Long haul fiber support (90km for 100FX, 100km for 1000SX)
- High immunity to EMI and heavy electrical surges
- -40°C to +85°C operating temperature (no fans)
- Fully integrated power supply (no external adaptors)
- Universal high-voltage range: 88–300VDC or 85–264VAC
- Dual low-voltage DC inputs: 24VDC (10–36VDC) or 48VDC (36–59VDC)
- Mechanically retained electrical connectors
- Conformal coating for extra environmental protection



OEM Technology Solutions

Reduce your time to market when integrating Layer 2 switching into your products.



RUGGEDCOM RS900M OEM Module *10-Port Managed Ethernet Switch Module for OEM Applications*

- Supports up to 10 FastEthernet™ ports, or 8 FastEthernet™ ports and 2 Gigabit Ethernet ports
- Full RUGGEDCOM Operating System (ROS®) feature set
- Compact design and small footprint (3"x4")
- Low power consumption – 3.3VDC operation



RUGGEDCOM RNA Technology Module *3-Port PRP/HSR Redbox OEM modules*

- Supports 1 local and 2 HSR/PRP ports
- 10/100/1000 Mbps fiber or copper
- IEEE 1588v2 transparent clock

FastConnect™ Cabling System

Stringent demands are placed on the installation of cables in the industrial environment. Siemens offers FastConnect™, a system that fulfils all these requirements: On-site assembly – quick, easy and error-free.

- Less time is spent connecting terminals
- Greater flexibility due to configuring the optimum cable length with the right connector for the terminal directly on site
- Reduced planning costs for ordering preassembled cables
- Easy installation using just one tool
- Easy routing of cables with pre-assembled connectors
- Mistakes are prevented thanks to color coding and the transparent contact cover



19" Ethernet Switches

Maximize productivity with utility grade reliability
Cyber attack prevention via advanced security
Field proven MTBF delivers lower OPEX costs.

RUGGEDCOM RSG2488

28-Port Advanced Utility Grade, High Density Managed Gigabit Ethernet Switch

- Field replaceable Ethernet media modules
- Hot-swappable power supplies
- Full 28 Gigabit non-blocking architecture
- 10/100/1000 Mbps Copper (RJ45 or M12) or 100/1000 Mbps Fiber (LC, SC or ST)
- IEEE 1588 hardware time stamping
- Available PTP module provides GPS time source and IRIG-B in/out
- Time conversion between IEEE 1588, IRIG-B and NTP/SNTP

RUGGEDCOM RSG2100

19-Port Modular Managed Ethernet Switch with Gigabit Uplinks

- 3x 1000BaseX (Gigabit) + 16x 10/100BaseX
- Hazardous Location certification: Class 1 Division 2
- Power over Ethernet (PoE) version available

RUGGEDCOM RSG2200

9-Port Managed Gigabit Ethernet Switch

- 1000BaseX (Gigabit) and/or 10/100/1000BaseTX
- Hazardous Location certification: Class 1 Division 2

RUGGEDCOM RSG2288

9-Port Managed Gigabit Ethernet Switch with IEEE 1588 v2 and IRIG-B Conversion

- 1000BaseX (Gigabit) and/or 10/100/1000BaseTX
- Available PTP module provides GPS time source and IRIG-B in/out

RUGGEDCOM RSG2300

32-Port Managed Ethernet Switch with Gigabit Uplinks

- 24x 10/100BaseTX + 4x 10/100BaseX + 4x 100/1000BaseX
- Hazardous Location certification: Class 1 Division 2
- Power over Ethernet (PoE) version available

Common features

- Rugged Rated for reliability in harsh environments
- Many different fiber port options available
- Long haul fiber support
- High immunity to EMI and heavy electrical surges
- -40°C to +85°C operating temperature (no fans)
- Fully integrated power supply (no external adaptors)
- Low voltage DC input and High voltage AC/DC input options available



Compact Ethernet Switches

Space saving high performance compact design.
Cyber attack prevention with advanced security.
Field proven MTBF delivers lower OPEX costs.



RUGGEDCOM RS900

9-Port Managed Ethernet Switch with Fiber Uplinks

- 6x 10/100BaseTX + 3x 100BaseFX
- Hazardous Location certification: Class 1 Division 2



RUGGEDCOM RS900G

10-Port Managed Ethernet Switch with Gigabit Uplinks

- 8x 10/100BaseTX + 2x 1000BaseX (Gigabit)
- Hazardous Location certification: Class 1 Division 2



RUGGEDCOM RS900GP

10-Port Managed PoE Ethernet Switch with Gigabit Uplinks

- 8x 10/100BaseTx 802.3af / 802.3at compliant ports
- Up to 2x 10/100/1000BaseTX or 2x 100/1000BaseX
- Powers up to 8 ports with 802.3at



RUGGEDCOM RS940G

8-Port Managed Gigabit Ethernet Switch

- 6x 10/100/1000BaseTX + optional 2x 1000BaseX (Gigabit)
- Hazardous Location certification: Class 1 Division 2



RUGGEDCOM RS950G

3-Port Managed PRP/HSR Redundancy Box

- 3-port Gigabit redundancy box
- 1 local port, 2x HSR/PRP ports
- Line speed Gigabit performances



RUGGEDCOM RS969

IP66/IP67 Rated 10-Port Managed Ethernet Switch with Fiber Uplinks

- 8x 10/100BaseTX ports + optional 2x 1000BaseX (Gigabit)
- Hazardous Location certification: Class 1 Division 2
- Waterproof: IP66 (water jets) and IP67 (water immersion)
- IP67 rated M12 or RJ45 copper port connectors
- Redundant integrated power supply with high-voltage AC/DC and low-voltage DC options

Compact Switches with Fiber Optics

Space saving high performance compact design.
Full array of intelligent functionality.
High network availability and manageability.

RUGGEDCOM i800 Product Family

Unmanaged or Managed Ethernet Switch

- Four models to choose from with up to 8x 10/100 BaseTX Ports and up to 3x fiber ports
- i800: 8x 10/100Tx
- i801: 8x 10/100Tx + 1x 1000LX or 1x 10/100/1000Tx
- i802: 6x 10/100Tx + 1x 100FX or 2x 100FX or 2x 1000LX or 2x 10/100/1000Tx
- i803: 4x 10/100Tx + 1x 100FX + (2x 1000LX or 2x 100FX)

Common features

- Rugged Rated for reliability in harsh environments
- Long reach fiber support
- High immunity to EMI and heavy electrical surges
- Serial management console
- Fail-safe relay
- -20°C to +60°C operating temperature (-40°C to +85°C optional)
- Fanless operation
- Hazardous location certification: Class 1 Division 2
- Dual low-voltage DC inputs: 24VDC (10–36VDC)



EoVDSL Compact Switches

VDSL reduces installation costs using existing cabling.
Space saving high performance compact design.
Field proven MTBF delivers lower OPEX costs.



RUGGEDCOM RS900L

8-Port Managed Ethernet Switch with EoVDSL Uplinks

- 1x EoVDSL + 6x 10/100BaseTX + optional 2x 10/100BaseTX or 2x 100BaseFX ports



RUGGEDCOM RS910L

Serial and Ethernet Device Server with EoVDSL Uplinks

- 1x EoVDSL port + 2x RS232/RS422/RS485 Serial ports (DB9 or RJ45) + 2x 10/100BaseTX or 2 100BaseFX



RUGGEDCOM RS920L

Dual Port Serial Device Server with EoVDSL Uplinks

- 2x EoVDSL ports + 2x RS232/RS422/RS485 Serial ports (DB9 or RJ45)



RUGGEDCOM RS930L

6-Port Managed Ethernet Switch with EoVDSL Uplinks

- 2x EoVDSL ports + 6x 10/100BaseTX ports

Common Features

- Rugged Rated for reliability in harsh environments
- Long haul fiber support
- High immunity to EMI and heavy electrical surges
- Serial management console
- Fail-safe relay
- -40°C to +85°C operating temperature (no fans)
- Hazardous location certification: Class 1 Division 2
- Fully integrated power supply
- Universal high-voltage range: 88–300VDC or 85–264VAC
- DC inputs: 24VDC (10–36VDC) or 48VDC (36–72VDC)

Media Converters

Converts speed and media to preserve existing cabling.
Reduces installation costs.
Plug and play reduces configuration costs.

RUGGEDCOM RMC

Ethernet Media Converter (Copper to Fiber)

- 10BaseT to 10BaseFL
- 100BaseTX to 100BaseFX

RUGGEDCOM RMC20

Serial Media Converter (Copper to Fiber)

- RS485/RS422/RS232 conversion to multimode fiber and back

RUGGEDCOM RMC40

4-Port Ethernet Media and Speed Converter

- 10/100TX to 100FX or 10/100TX
- Provides media and speed conversion
- Unmanaged switch

RUGGEDCOM RMC41

2-Port Ethernet Media and Speed Converter

- 10/100TX to 100FX converter

Common Features

- Rugged Rated for reliability in harsh environments
- -40°C to +85°C operating temperature (no fans)
- Integrated power supply (24, 48, 88–300VDC/85–264VAC)
- Fail-safe relay



Serial Device Servers

Increases ROI of legacy serial devices.
Reduces serial cabling costs.
Remote accessibility reduces management costs.

RUGGEDCOM RS416

16-Port Serial Device Server with Integrated 4-Port Managed Ethernet Switch and IEEE 1588 v2 to IRIG-B Conversion

- Up to 16 Serial ports: RS485/RS422/RS232 via DB9/RJ45 or Fiber Serial interface via ST
- Optional dual redundant power supplies
- Power over Ethernet (PoE) version available

RUGGEDCOM RS400

4-Port Serial Device Server with Integrated 4-Port Managed Ethernet Switch

- 4x RS485/RS422/RS232 serial ports (DB9, RJ45, or screw terminals)
- Integrated V.90 modem (optional)

RUGGEDCOM RS910

2-Port Serial Device Server with Integrated 3-Port Managed Ethernet Switch

- 2x Serial Ports (RS485/RS422/RS232 via DB9/RJ45 or Fiber Serial interface via ST) + 3x 10/100 BaseX
- Serial fiber interface option (ST)

RUGGEDCOM RMC30

2-Port Serial Device Server

- RS232/RS422/485 Serial to IP conversion

Common features

- Rugged Rated for reliability in harsh environments
- Transmit serial data over an IP network
- Support for Modbus TCP, DNP3, TIN serial protocols
- Raw socket mode allows conversion of any serial protocol
- -40°C to +85°C operating temperature (no fans)
- Integrated power supply (10–36VDC, 36–59VDC, 88–300VDC/85–264VAC)



Power Injectors

Reduces costs by eliminating separate power and data cabling.
Investment protection – handles low and high power devices.
Plug and play reduces configuration costs.

RUGGEDCOM RP100

Single Port PoE Injector

- 802.3at / af compliant or RM version for connection to RUGGEDCOM WIN products

RUGGEDCOM RP110

Serial Power over Ethernet Injector

- 1x RS422/485 port + 1x RS232 port
- IRIG-B output
- Transmits serial data over an IP network
- Support for Modbus TCP, DNP3, TIN serial protocols
- Raw socket mode allows tunneling of any serial protocol

Common Features

- Rugged Rated for reliability in harsh environments
- IEEE 1613 and IEC 61850-3 compliant
- Space saving compact design (11.75cm x 5.65cm x 9.52cm H/W/D)
- -40°C to +85°C operating temperature (no fans)
- Integrated power supply (10–60 VDC, 88–300VDC/85–264VAC)
- Space saving compact design
- Reduces cabling, connection and power supply requirements for PoE devices
- Automatic detection of remote power devices
- Output fault protection



WiMAX 4G Broadband Private Radio

Optimized for multi service support.

Deployable in any environment.

Extends network boundaries through a standards based wireless solution.



RUGGEDCOM WIN7000

High Power Base Station

- Available in multiple frequencies (1.x, 2.x, 3.x GHz)
- High output power of 2x 36dBm
- Single cable power and Ethernet, or fiber optic interface options



RUGGEDCOM WIN7200

Small Form Factor Base Station

- Available in multiple frequencies (2.x, 3.x, 3.65, 4.9, 5.8 GHz)
- Small form factor and low power consumption
- Power over Ethernet (PoE) single cable design



RUGGEDCOM WIN5100

Vehicular Subscriber Unit

- 2 antenna connectors for external or roof top antenna connection
- Powered directly through 10–30 VDC or PoE



RUGGEDCOM WIN5200

Outdoor Subscriber Unit

- High gain integrated antenna
- Power over Ethernet (PoE)
- RP100/110 compatible for 10–60 VDC or 85–265VAC, 88–300VDC

Common Features

- Rugged Rated for reliability in harsh environments
- Over the air IEC 61850 GOOSE messaging support
- Unique standalone architecture allows cost effective, incremental deployment
- Seamless mobility in standalone mode
- Excellent performance in NLOS conditions – overcoming multipath and deep fading
- Greater than 40 Mbps aggregate throughput
- Mobile-WiMAX compliance based on IEEE 802.16e standard and WiMAX Forum Wave2 (MIMO) certification
- Multiservice support including, voice, SCADA, mission critical control data, video and more
- Central management through RUGGEDCOM NMS

Wireless LAN Extension

Secure wireless extension of LAN to field devices.
Lower Mean Time To Repair.
Engineered for harsh environments.

RUGGEDCOM RS900W

Wireless Ethernet with Integrated 8-Port Switch

- 6x 10/100BaseTX + optional
2x 10/100BaseTX or 2x 100BaseFX
- Can be configured as an access point,
client or bridge device

RUGGEDCOM RS910W

*Wireless Device Server with 2 Serial
and/or 2 Ethernet Ports*

- 2x serial and/or 2x Ethernet ports
- RS485/RS422/RS232 (DB9 or RJ45)
- Copper or fiber Ethernet ports

RUGGEDCOM RS920W

*Wireless Serial Device Server with 2 Serial
Ports and/or Ethernet over VDSL Interface*

- 1x Ethernet over VDSL (EoVDSL) interface
- 2x serial ports RS485/RS422/RS232 (DB9 or RJ45)

RUGGEDCOM RS930W

*Wireless Ethernet with Integrated 6-Port
Switch and Ethernet over VDSL Interface*

- 1x Ethernet over VDSL interface
- 6x 10/100BaseTX Ethernet ports
- Can be configured as an access
point, client or bridge device

Common Features

- Rugged Rated for reliability in
harsh environments
- IEEE 802.11b/g compliant (up to 54 Mbps)
- WPA2/802.11i with CCMP for robust security
and encryption
- WPA (Wi-Fi Protected Access) with TKIP (Temporal Key
Integrity Protocol) for enhanced security and encryption
- IEEE 802.1X/RADIUS using EAP-PEAP for secure
“enterprise class” authentication configuration
- Pre-shared Key Mode (PSK) for “personal” mode
authentication configuration
- Central management through RUGGEDCOM NMS
- Many different fiber port options available
- High immunity to EMI and heavy electrical surges
- -40°C to +85°C operating temperature (no fans)
- Integrated power supply (10–36VDC, 36–59VDC,
88–300VDC/85–264VAC)

Wireless approvals

Current approvals can be found on the Internet at:
<http://www.siemens.com/wireless-approvals>



Software Solutions


Secure access management and NERC CIP compliance.
Password and configuration management.
Substation automation and data integration.

A modern substation contains vast amounts of data, subsets of which are of interest to control center or enterprise applications and users. RUGGEDCOM software solutions have been developed to help the electric utility industry by providing secure access to this data, processing it into useful information and making it available in a usable format to a wide range of users and enterprise systems.

RUGGEDCOM CROSSBOW

An enterprise level solution for managing and securing remote maintenance access to field devices in compliance with the NERC CIP standards. Offers tremendous ease of use, and unique automation capabilities for change management applications.

Electronic Security Perimeter

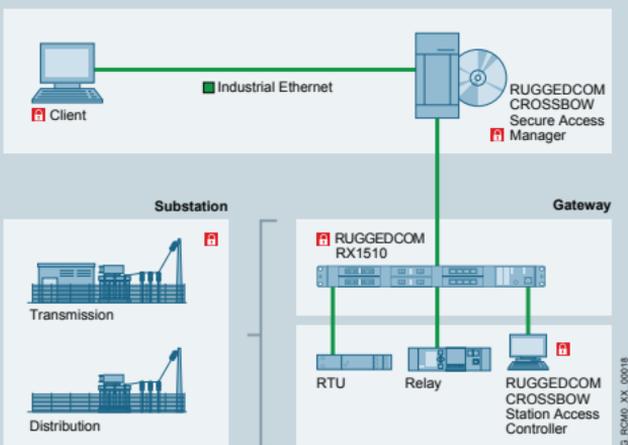

Features:

- Secure remote access
- Authenticate users against IT systems
- Automate user login
- Manage device passwords and configurations
- Control, log, and report user access

Web-launched HMI for substations and small SCADA.
Complete substation data visualization and analysis.
Support for Condition-Based Maintenance (CBM).

RUGGEDCOM ELAN

RUGGEDCOM ELAN modular, Linux/ROX-based substation servers and front-end processors excel at accessing all types of device data, and getting it to the clients that require it.

Features:

- Preserves investment in legacy devices and control center applications
- Supports both SCADA and non-SCADA hosts, such as data historians
- Protocol conversion and routing, real-time engine with support for most commonly used protocols
- Automated event file retrieval from major relay vendors
- Powerful automation processing capabilities

RUGGEDCOM REFLEX

RUGGEDCOM REXLEX is a monitoring and control application purpose built for distribution networks, allowing the creation of systems that cover the spectrum from single user HMI to mobile distribution management to enterprise level monitoring and control.

Features:

- Single line visualization
- Graphic trending of values
- Alarm summary and alerting
- Report generation
- Web-launched client
- Integrated data historian

Network Management and Configuration

RUGGEDCOM NMS

RUGGEDCOM NMS is a fully-featured enterprise grade network management software solution. Based on OpenNMS, RUGGEDCOM NMS provides a comprehensive, centralized, scalable platform for monitoring, configuring and maintaining mission-critical IP-based communications networks. It features a powerful web based user interface which provides a clear, high-level view of network activities. A versatile auto discovery and polling subsystem simplifies configuration and management.

In addition, RUGGEDCOM NMS offers comprehensive reporting capabilities as well as the ability for users to create custom reports. ROS, ROX and ROXII based RUGGEDCOM products, as well as the RUGGEDCOM WIN product family, can be easily configured and managed with RUGGEDCOM NMS.

Features:

- Centralized management and monitoring of network and networked devices to achieve desired level of network availability performance and operational efficiency
- Greater network visibility to enable proactive corrective actions and improved capacity utilization
- Web based UI with graphical network view
- Configurable auto discovery and polling subsystem
- Flexible reporting options
- Event handling via polling and SNMP trap support
- Interfaces for equipment configuration via external applications such as Web Browser and TELNET
- Supports the use of SNMP v1, v2c and v3 (SNMP security)

RUGGEDCOM PING

RUGGEDCOM PING is a high speed graphical ping tool. This handy utility can send an ICMP echo request message every 1ms. Network administrators will be able to perform RSTP performance testing, ping sweeps, and monitor devices with RUGGEDCOM PING.

Features:

- Allows users to test the recovery time of their networks
- Provides up to 1ms accuracy on Ethernet switching equipment response times
- Gives detailed reports of network outages
- Discovers and probes the responsiveness of multiple devices simultaneously

RUGGEDCOM EXPLORER

RUGGEDCOM EXPLORER is a powerful tool to easily provision and configure new and existing ROS® based devices. RUGGEDCOM EXPLORER can run on any LAN based MS Windows PC, eliminating the need to connect a serial cable to any of the devices. Its built-in file transfer capabilities allow users to easily upload and download files and firmware from one convenient console.

Features:

- Fast, automatic discovery of ROS® devices
- Uses RSH to configure network parameters on non-provisioned or provisioned devices
- Intuitive GUI displays all ROS® devices and visually identifies duplicate IP addresses
- Automatically discovers new devices added to the network
- Manage and transfer files to ROS devices
- Easy identification of devices via control of panel LEDs

RUGGEDCOM DIRECTOR

RUGGEDCOM DIRECTOR is a serial port re-direction application that is designed to extend the life and reach of applications written for serial communications. With RUGGEDCOM DIRECTOR, serial port communications are no longer limited by serial protocol cable length requirements or physical port counts that restrict the design and flexibility of networks and the ability to manage them.

Features:

- Redirect serial port traffic over the network extending the life and range of serial devices
- Eliminate physical port restriction with up to 128 virtual serial ports
- Intuitive Windows based GUI to get up and running quickly
- Monitor real-time status and log traffic for quick problem resolution
- Load and save configuration profiles for backup and migration
- Re-use existing applications without modification